



On the Ongoing Evolution of Very High Frequency Power Supplies

Knott, Arnold; Andersen, Toke Meyer; Kamby, Peter; Madsen, Mickey Pierre; Kovacevic, Milovan; Andersen, Michael A. E.

Published in:
Proceedings of The IEEE Applied Power Electronics Conference and Exposition

Link to article, DOI:
[10.1109/APEC.2013.6520649](https://doi.org/10.1109/APEC.2013.6520649)

Publication date:
2013

[Link back to DTU Orbit](#)

Citation (APA):
Knott, A., Andersen, T. M., Kamby, P., Madsen, M. P., Kovacevic, M., & Andersen, M. A. E. (2013). On the Ongoing Evolution of Very High Frequency Power Supplies. In *Proceedings of The IEEE Applied Power Electronics Conference and Exposition: APEC* (pp. 2514-2519). IEEE.
<https://doi.org/10.1109/APEC.2013.6520649>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

On the Ongoing Evolution of Very High Frequency Power Supplies

Arnold Knott*, Toke M. Andersen*, Peter Kamby*, Mickey P. Madsen*, Milovan Kovacevic*, Michael A.E. Andersen*

*Technical University of Denmark

Ørstedes Plads, bygning 349

2800 Kongens Lyngby

Denmark

Email: akn@elektro.dtu.dk

Abstract—The ongoing demand for smaller and lighter power supplies is driving the motivation to increase the switching frequencies of power converters. Drastic increases however come along with new challenges, namely the increase of switching losses in all components. The application of power circuits used in radio frequency transmission equipment helps to overcome those. However those circuits were not designed to meet the same requirements as power converters. This paper summarizes the contributions in recent years in application of very high frequency (VHF) technologies in power electronics, describes the remaining challenges and shows results of the recent advances, among others a 120MHz, 9 W LED driver with 89 % efficiency.

I. INTRODUCTION

The continuing trend of miniaturization in industrial and consumer electronics is continuously driving a demand for smaller power supplies. Weight and cost reduction demands accompany this trend. Within power supplies the major size, weight and cost drivers are typically the passive components. Increasing the switching frequency of power converters can reduce the size, weight and therefore the cost of those. For substantial size and weight reduction, the switching frequencies are increased up to the very high frequency (VHF) band (30 MHz to 300 MHz), which leads to a merge in circuit technologies used in radio frequency transmitters [1]–[6] and the classical power electronics circuits.

The VHF amplifiers are designed for DC-AC conversion, where the AC simultaneously is the switching frequency. Generally those circuits [1], [2] drive a known load impedance, typically a 50 Ω antenna. The most efficient standard representatives of radio frequency amplifiers are class-E [3], [4] and class-F [5], [6], where Class-E applies zero-voltage-switching (ZVS) and Class-F applies zero-current-switching (ZCS) techniques. Similarly to switch-mode power supplies, those VHF amplifiers convert the constant supply voltages into a high-frequency voltage by operating power semiconductors in the cut-off or saturation region only. The major difference is, that VHF amplifiers do not convert the energy back into a constant voltage or current level.

Numerous research works have been published [7]–[18], filling this gap and making VHF technologies available for power electronics. This paper describes the individual contributions

of those in greater detail. However there are still some challenges left, before VHF switch-mode power supplies can relieve their advantages for products in industrial and consumer electronics.

This paper elaborates on the remaining challenges based on previous work and characterizes them in Section II. Section III describes the most recent advances, showing prototypes and measurement results. Section IV concludes the paper.

II. CHALLENGES OF VHF CONVERTERS

VHF operation of power supplies differs from sub-megahertz operated power supplies (here called traditional power converters) mainly by the following subjects:

- Electronic components, both active and passive,
- Circuit architectures for power stages and control parts,
- Adjacent behavior, such as electromagnetic compatibility (EMC) and mechanics.

A. Components

Especially inductive components are size, weight and cost optimization limitations in nowadays power circuits. Simultaneously VHF converters provide a major opportunity to overcome those.

Among the challenges are core losses, skin and proximity effect [19]–[25]. Another challenge within passive components for VHF is the creation of a galvanic isolation barrier [26], [27].

Despite passive components also active components, i.e. the power semiconductors, need to fulfill other requirements than in usual power supplies [28]–[30]. The parasitic components have a big influence on the design of the overall converter, as they are part of the design parameters. Unlike traditional power stages, the parasitic elements are therefore not considered undesired, but form an integral part of the stage. An example is the output capacitance C_{oss} of the power semiconductor in a Class-E based power supply. According to [17] it is dependent on output power P_{out} , input voltage V_{in} and switching frequency f_{sw} as shown in equation 1.

$$P_{out} = 2\pi^2 f_{sw} C_{oss} V_{in}^2 \quad (1)$$

Fig. 1: Complete schematic of a self-oscillating VHF converter [32] with LED load.

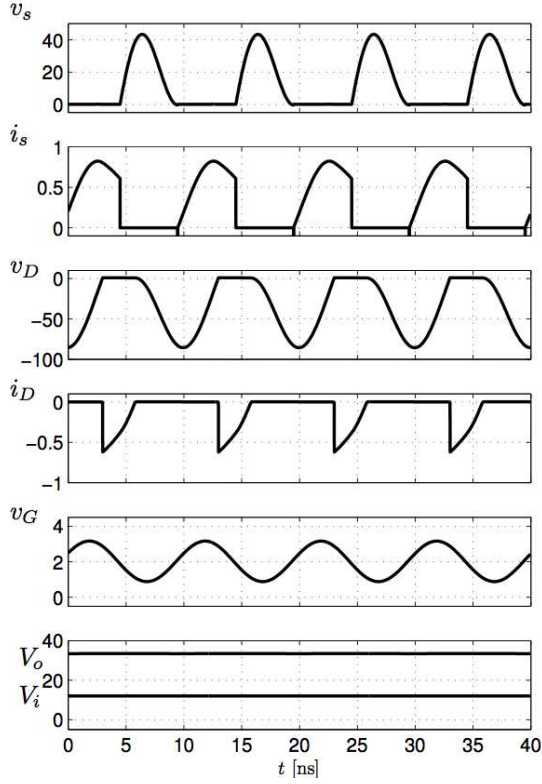


Fig. 2: Simulation of waveforms for a ZVS and ZdVS Class-E based converter from [17].

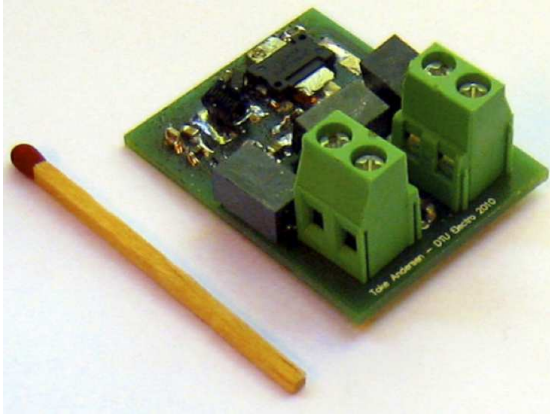


Fig. 3: Photograph of the self-oscillating VHF converter from [32].

as a function of time and junction potential.

The other components of the power stage have been investigated in [18] as well. Thereby most focus is on the inductors, as these are the most volume consuming parts, have the biggest weight and typically a big impact on the overall price of the converter. Therefore the inductors have been integrated as toroids into the printed circuit board (PCB). This process

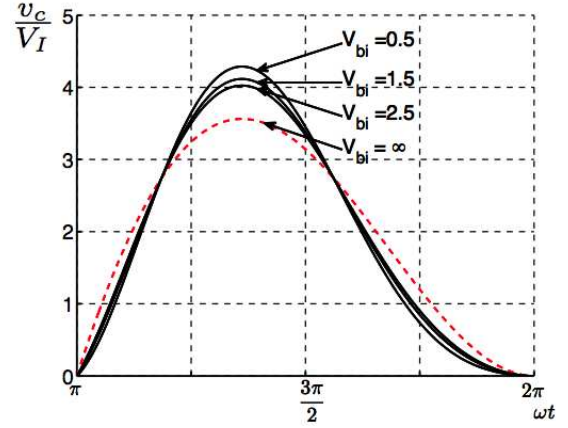


Fig. 4: Voltage stress of the power switch in relation to DC input voltage for a nonlinear output capacitance from [18]. V_{bi} is the junction potential of the process.

is described in [41] and Figure 5 shows the principle.

The resulting converter waveform in the optimal and suboptimal operating regions are shown in Figure 6. The converters efficiency is in the same area as the previous presented. For dealing with the efficiency challenge, [42] compared a number of power switches both in simulation and experiment. Figure 7 shows photographs of the implementations. On top of that an effective line- and load regulation scheme was implemented in those.

Figure 8 shows the implementation of the final prototype with 70 MHz switching frequency. The voltage step-down ratio of the converters is 10 and the output power range is between 1



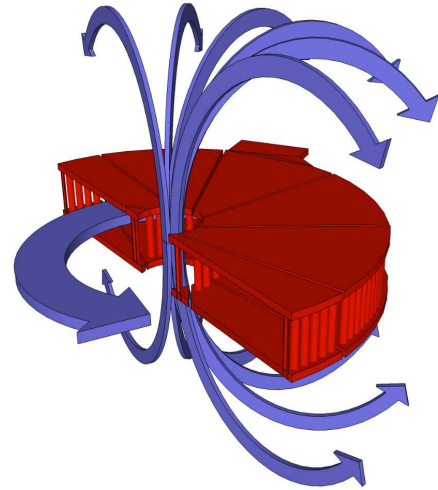


Fig. 5: PCB integrated inductor from [41]. The copper contained in the PCB is shown in red. The blue arrows mark the magnetic field.

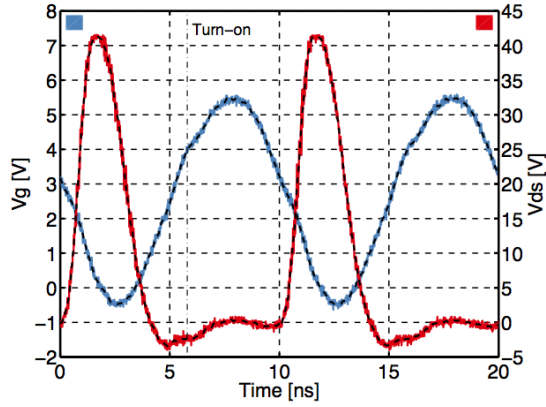

(a) optimal operation

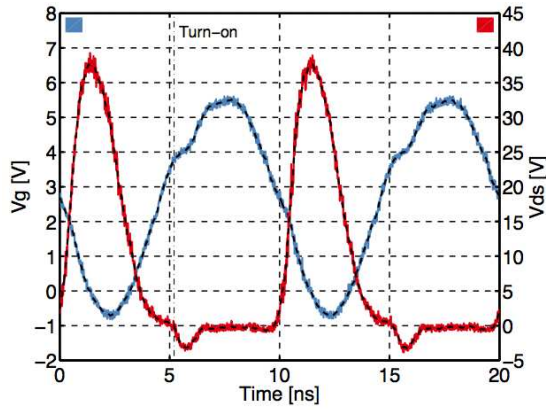

(b) suboptimal operation

Fig. 6: Measurements of gate-source and drain-source voltages V_{gs} and V_{ds} of the power switch and the turn-on instances. Note that the drain-source voltage has an offset of -0.5 V, due to the oscilloscopes offset.

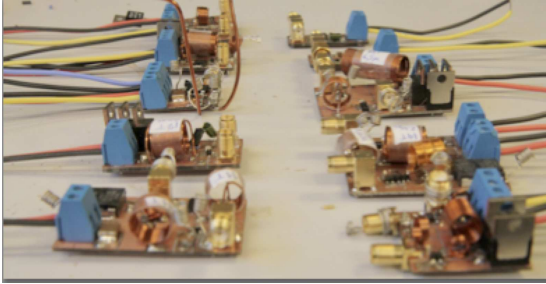


Fig. 7: Photograph of numerous prototypes for comparing measured efficiency with simulations [42].

and 4W at an efficiency within this range beyond 70 %.

Additionally the self-oscillating principle from [17], [32] was applied to an interleaved Class-E converter in [43], resulting into a significant efficiency improvement. The complete schematic is shown in Figure 9. The realized converter is switching at 120 MHz, i.e. beyond the FM band, converts

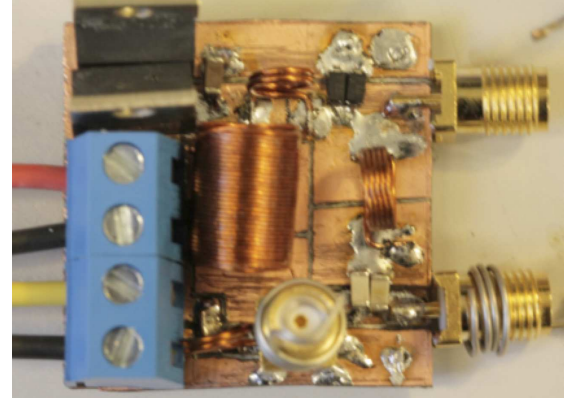


Fig. 8: Photograph of a closed loop low-power VHF converter with an efficiency beyond 70 % from [42]. The TO220 components on the upper left is the dummy load resistance.

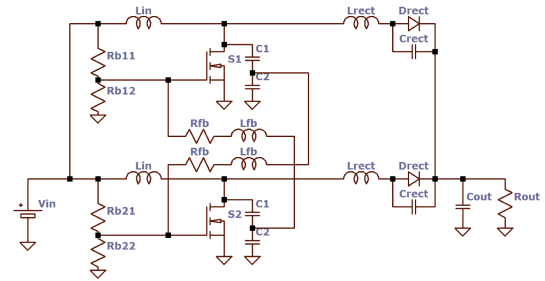


Fig. 9: Full schematic of interleaved Class-E converter from [43].


an input voltage between 6 and 9 V into an output current between 0.4 and 0.5 A and has an efficiency between 80 and 89 % within this operation range. The output power range is 3 to 9 W and the converter is built for LED drive. Figure 10 shows both a SPICE based simulation and a the measurement of the power switches voltage waveforms.

IV. CONCLUSION


The merge of techniques used in radio communication electronics and power electronics was pointed out. The development through the previous decades has been revisited and recent developments were summarized. Remaining challenges and the latest advances were described. The implementations of numerous VHF converters were presented. Among them are low-power, high-step-down converters with a switching frequency of 70 MHz and an efficiency beyond 70 % as well as a 120 MHz, 9 W LED driver with an efficiency up to 89 %. Both converters maintain high efficiencies over a wide load range.

REFERENCES

- [1] A. Grebennikov and N.O. Sokal. *Switchmode RF power amplifiers*. Communications engineering series. Elsevier/Newnes, 2007, ISBN: 9780750679626.

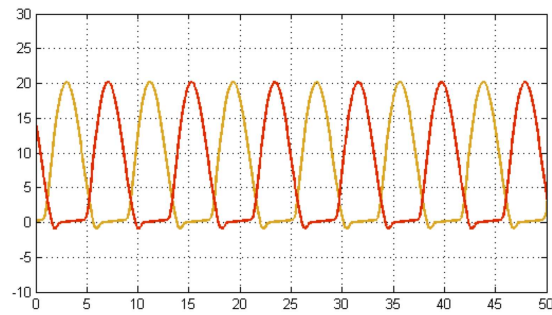

(a) simulated waveforms

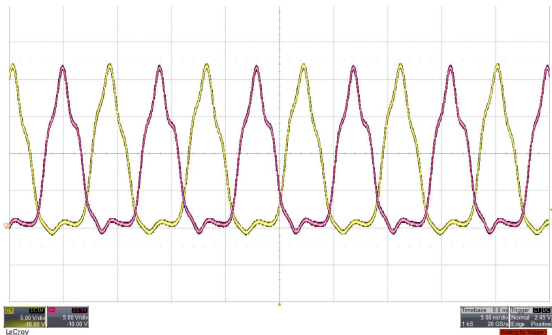

(b) measured waveforms

Fig. 10: Drain-source waveforms of the two power switches in the interleaved converter from [43].

- [2] M. Kazimierzczuk. *RF power amplifiers*. Wiley, 2008, ISBN: 9780470779460.
- [3] N. O. Sokal, A. D. Sokal. Class E-A new class of high-efficiency tuned single-ended switching power amplifiers. *IEEE Journal of Solid-State Circuits*, SC-10(3):168–176, June 1975.
- [4] N. O. Sokal. Class-E High-Efficiency RF/Microwave Power Amplifiers: Principles of Operation, Design Procedures, and Experimental Verification. *Analog Circuit Design*, Springer, 2003.
- [5] Raab, F.H. Maximum efficiency and output of class-F power amplifiers. *IEEE Transactions on Microwave Theory and Techniques*, 49(6):1162–1166, June 2001.
- [6] Raab, F.H. Class-F power amplifiers with maximally flat waveforms. *IEEE Transactions on Microwave Theory and Techniques*, 45(11):2007–2012, November 1997.
- [7] David A. Jackson. Design and Characterization of a Radio-Frequency dc/dc Power Converter. Master's thesis, Massachusetts Institute of Technology, 2005.
- [8] James Raymond Warren III. Cell Modulated dc/dc Converter. Master's thesis, Massachusetts Institute of Technology, 2005.
- [9] Robert C. N. Pilawa-Podgurski. Design and Evaluation of a Very High Frequency dc/dc Converter. Master's thesis, Massachusetts Institute of Technology, 2007.
- [10] Anthony Sagneri. Design of a Very High Frequency dc-dc Boost Converter. Master's thesis, Massachusetts Institute of Technology, 2007.
- [11] Olivia Leitermann. Radio Frequency dc-dc Converters: Device Characterization, Topology Evaluation, and Design. Master's thesis, Massachusetts Institute of Technology, 2008.
- [12] Joshua W. Phinney. *Multi-resonant Passive Components for Power Conversion*. PhD thesis, Massachusetts Institute of Technology, May 2005.
- [13] Juan Rivas. *Radio Frequency dc-dc Power Conversion*. PhD thesis, Massachusetts Institute of Technology, September 2006.
- [14] Yehui Han. *Circuits and Passive Components for Radio-Frequency Power Conversion*. PhD thesis, Massachusetts Institute of Technology, February 2010.
- [15] Perreault, D.J.; Jingying Hu; Rivas, J.M.; Yehui Han; Leitermann, O.; Pilawa-Podgurski, R.C.N.; Sagneri, A.; Sullivan, C.R. Opportunities and Challenges in Very High Frequency Power Conversion. *Annual IEEE Applied Power Electronics Conference and Exposition*, (24):1–14, 2009.
- [16] Rivas, J.M. Wahby, R.S. Shaffran, J.S. Perreault, D.J. New Architectures for Radio-Frequency DC-DC Power Conversion. *IEEE Transactions on Power Electronics*, Vol. 21(2):380–393, March 2006.
- [17] Andersen Toke. Master Thesis: Radio Frequency Switch-Mode Power Supply. Master's thesis, Technical University of Denmark, 2010.
- [18] Peter Kamby. Master Thesis: High Efficiency Radio Frequency Switch-mode Power Supply for LED Applications. Master's thesis, Technical University of Denmark, 2011.
- [19] Shanshan Lu; Yuqin Sun; Goldbeck, M.; Zimmmanck, D.R.; Sullivan, C.R. 30-MHz Power Inductor Using Nano-Granular Magnetic Material. *IEEE Power Electronics Specialists Conference*, pages 1773–1776, June 2007.
- [20] Sullivan, C.R.; Weidong Li; Prabhakaran, S.; Shanshan Lu. Design and fabrication of low-loss toroidal air-core inductors. *IEEE Annual Power Electronics Specialists Conference*, (38th):1754–1759, June 2007.
- [21] Jizheng Qiu, Sullivan, C.R. Inductor design for VHF tapped-inductor dc-dc power converters. *Applied Power Electronics Conference and Exposition*, (26th):142 – 149, March 2011.
- [22] Phinney, J.W.; Perreault, D.J.; Lang, J.H. Radio-Frequency Inverters With Transmission-Line Input Networks. *IEEE Transactions on Power Electronics*, 22(4):1154–1161, July 2007.
- [23] Yehui Han; Cheung, G.; An Li; Sullivan, C.R.; Perreault, D.J. Evaluation of magnetic materials for very high frequency power applications. *IEEE Power Electronics Specialists Conference*, pages 4270–4276, 2008.
- [24] Zirath, H.; Rutledge, D.; . An LDMOS VHF class E power amplifier using a high Q novel variable inductor. *IEEE MTT-S International Microwave Symposium*, Vol. 1:367–370, June 1999.
- [25] M.K. Kazimierzczuk. *High-Frequency Magnetic Components*. John Wiley & Sons, 2009, ISBN: 9780470714539.
- [26] Bowman, W.C.; Balicki, F.T.; Dickens, F.T.; Honeycutt, R.M.; Nitz, W.A.; Strauss, W.; Suiter, W.B.; Ziesse, N.G. A resonant DC-to-DC converter operating at 22 Megahertz. *Applied Power Electronics Conference and Exposition*, (3):3–11, 1988.
- [27] Sagneri, A.D.; Anderson, D.I.; Perreault, D.J. Transformer synthesis for VHF converters. *International Power Electronics Conference (IPEC)*, pages 2347–2353, June 2010.
- [28] Warren, J.R.; Rosowski, K.A.; Perreault, D.J. Transistor Selection and Design of a VHF DC-DC Power Converter. *IEEE Transactions on Power Electronics*, Vol. 23(1):27–37, January 2008.
- [29] Spiazzi, G.; Mattavelli, P.; Rossetto, L. Effects of Parasitic Components in High-Frequency Resonant Drivers for Synchronous Rectification MOSFETs. *IEEE Transactions on Power Electronics*, Vol. 23(4):2082–2092, July 2008.
- [30] Kuang Sheng; Yongxi Zhang; Liangchun Yu; Ming Su; Zhao, J.H. High-Frequency Switching of SiC High-Voltage LDMOS. *IEEE Transactions on Power Electronics*, Vol. 24(1):271–277, January 2009.
- [31] Pilawa-Podgurski, R.; Sagneri, A.D.; Rivas, J.M.; Anderson, D.I.; Perreault, D.J. Very-High-Frequency Resonant Boost Converters. *IEEE Transactions on Power Electronics*, 24(6):1654–1665, June 2009.
- [32] Andersen, T.M.; Christensen, S.K.; Knott, A.; Andersen, M.A.E. A VHF class E DC-DC converter with self-oscillating gate driver. *Applied Power Electronics Conference and Exposition (APEC)*, pages 885–891, March 2011.
- [33] Tatsuta, T.; Ishitani, Y.; Suetsugu, T. Gate power loss of class E amplifier with rectangular wave gate drive. *TENCON 2010 IEEE Region 10 Conference*, pages 1784–1787, November 2010.
- [34] Rivas, J.M.; Jackson, D.; Leitermann, O.; Sagneri, A.D.; Yehui Han; Perreault, D.J. Design Considerations for Very High Frequency dc-dc Converters. *Power Electronics Specialists Conference*, pages 1–11, June 2006.
- [35] M.K. Kazimierzczuk and D. Czarkowski. *Resonant Power Converters*. John Wiley & Sons, 2011, ISBN: 9780470905388.
- [36] Liu, D.H.; Jiang, J.G. High frequency characteristic analysis of EMI filter in switch mode power supply (SMPS). *Power Electronics Specialists Conference*, Vol. 4:2039–2043, June 2002.
- [37] Wang, C.P.; Liu, D.H.; Jiang Jianguo. Study of coupling effects among passive components used in power electronic devices. *Power Electronics and Motion Control Conference*, Vol. 3:1500–1504, August 2004.
- [38] Liyu Yang; Bing Lu; Wei Dong; Zhiguo Lu; Ming Xu; Lee, F.C.; Odendaal, W.G. Modeling and characterization of a 1 KW CCM PFC

converter for conducted EMI prediction. *Applied Power Electronics Conference and Exposition*, Vol. 2:763–769, February 2004.

- [39] Shuo Wang. *Characterization and Cancellation of High-Frequency Parasitics for EMI Filters and Noise Separators in Power Electronics Applications*. PhD thesis, Virginia Polytechnic Institute and State University, Blacksburg, Virginia, May 2005.
- [40] Redl, Richard; Molnar, Bela; Sokal, Nathan O. Class E Resonant Regulated DC/DC Power Converters: Analysis of Operations, and Experimental Results at 1.5 MHz. *IEEE Transactions on Power Electronics*, PE-1(2):111–120, 1986.
- [41] P. Kamby; A. Knott, M. A.E. Andersen. Printed Circuit Board Integrated Toroidal Radio Frequency Inductors. *37th Annual Conference on IEEE Industrial Electronics Society - IECON 2011*, October, 2012.
- [42] Mickey Madsen. Master Thesis: Offline Very High Frequency Power Converters. Master's thesis, Technical University of Denmark, 2012.
- [43] Kovacevic, Milovan; Knott, Arnold; Andersen, Michael A. E. Interleaved Self-Oscillating Class E Derived Resonant DC/DC Converters. *International Conference on Electrical and Computer Systems*, August 2012.